




VEHICLE RECOVERY WINCH
EW-10000W
 [OUTBACK]

EW-10000W

- Rated Line Pull:** 10000 lbs. (4532kgs) Single-Line
- Motor:** 6.6HP/12V Series-Wound
- Control:** Remote Switch, 12'(3.7m) lead
- Gear Train:** 3-Stage Planetary
- Gear Ratio:** 218:1
- Clutch:** Sliding Ring Gear
- Brake:** Automatic In-The-Drum
- Drum Size:** Diameter 2.5" (64mm) Length 8.8" (224mm)
- Wire Rope:** 94', 23/64" Diameter (28.5m, 9.2mm Diameter)
- Fairlead:** 4-Way Roller Fairlead
- Wireless Multi-control:** Included
- Recommended Battery:** 650CCA Minimum for Winching
- Battery Leads:** 35mm², 72" (1.83m)
- Finish:** Black/Dark Grey
- Weight:** 84 lbs. (38kg)
- Overall Dimensions:** (L x W x H) 21.15" x 6.3" x 8.6" (537 x 160 x 218mm)
- Mounting Bolt Pattern:** 10.00" ± 0.015" x 4.50" ± 0.010" (254.0mm x 114.3mm)

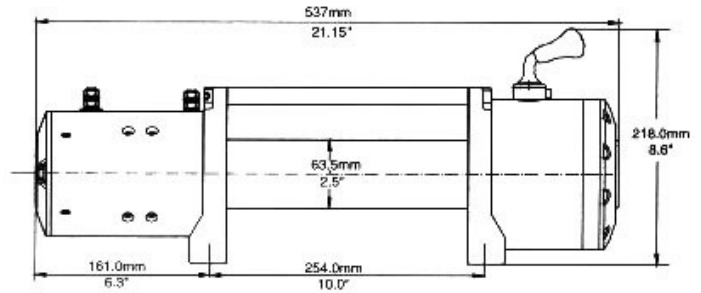

(L x W x H) 21.15" x 6.3" x 8.6"

Line Speed & Amp Draw-First Layer

Line	lbs	No	2000	4000	6000	8000	10000	
Pull	kgs	Load	910	1814	2720	3630	4532	
Line	fpm	12V	29.5	14.4	11.9	9.85	8.7	7.2
Speed	Mpm	12V	9	4.4	3.6	3	2.65	2.2
Motor Current	Amps	12V	70	170	240	310	380	425

Line Pull & Cable Capacity

Layer of Cable		1	2	3	4
Rated Line Pull	lbs	10000	8633	7716	7089
Per Layer	kgs	4532	3913	3497	3213
Cable Capacity	ft.	16	42	72	94
Per Layer	m	5	12	21	28

Exclusive North American Distributor
T-Max, LLC
 P.O. Box 4544 - Elkhart, IN 46514-0544



National Association of Testing Authorities, Australia

