


VEHICLE RECOVERY WINCH
EW-12500
 [Heavy Duty]

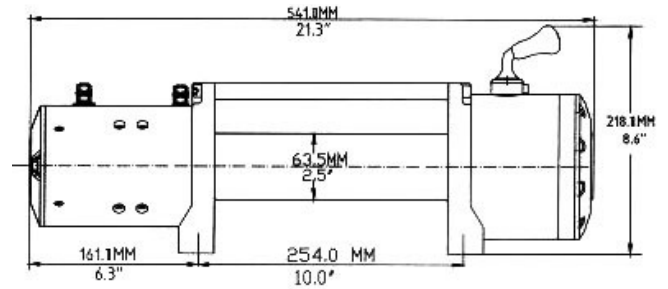

(L x W x H) 21.3" x 6.3" x 8.6"

EW-12500 HD

- Rated Line Pull:** 12500 lbs. (5665kgs) Single-Line
- Motor:** 6.6HP/12V Series-Wound
- Control:** Remote Switch, 12'(3.7m) lead
- Gear Train:** 3-Stage Planetary
- Gear Ratio:** 265:1
- Clutch:** Sliding Ring Gear
- Brake:** Automatic In-The-Drum
- Drum Size:** Diameter 2.52" (64mm) Length 8.82" (224mm)
- Wire Rope:** 94', 3/8" Diameter (28.5m, 9.5mm Diameter)
- Fairlead:** 4-Way Roller Fairlead
- Remote Control:** Included
- Recommended Battery:** 650CCA Minimum for Winching
- Battery Leads:** 35mm², 72" (1.83m)
- Finish:** Black/Dark Grey
- Weight:** 93 lbs. (42kg)
- Overall Dimensions:** (L x W x H) 21.3" x 6.3" x 8.6" (541 x 160 x 218mm)
- Mounting Bolt Pattern:** 10.00" ± 0.015" x 4.50" ± 0.010" (254.0mm x 114.3mm)

Line Speed & Amp Draw-First Layer

Line	lbs	No	2000	4000	6000	8000	10000	12000	12500	
Pull	kgs	Load	910	1814	2720	3630	4532	5440	5665	
Line	fpm	12V	23.5	12.6	10.3	8.7	7.2	6.3	5	4.3
Speed	Mpm	12V	7.2	3.85	3.15	2.65	2.2	1.9	1.5	1.3
Motor Current	Amps	12V	70	125	165	220	275	335	405	415

Line Pull & Cable Capacity

Layer of Cable		1	2	3	4
Rated Line Pull	lbs	12500	9210	8030	6894
Per Layer	kgs	5665	4170	3640	3125
Cable Capacity	ft.	17	38	65	94
Per Layer	m	4.8	11.5	20	28

Exclusive North American Distributor
T-Max, LLC
 P.O. Box 4544 - Elkhart, IN 46514-0544



National Association of Testing Authorities, Australia

