


VEHICLE RECOVERY WINCH
EW-9000-WCP
 [COMPETITION SERIES]

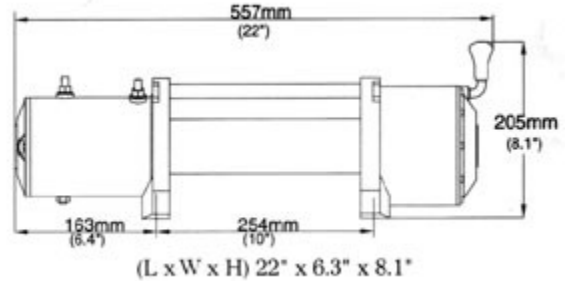

EW-9000-WCP

Rated Line Pull: 9000 lbs. (4080kgs) Single-Line
Motor: 6.6HP Series-Wound
Control: Remote Switch, 12'(3.7m) lead
Gear Train: 3-Stage Planetary
Gear Ratio: 172.8:1
Clutch: Shift Pin Ring Gear
Brake: Automatic In-The-Drum
Drum Size: Diameter 2.52" (66mm) Length 8.82" (224mm)
Synthetic Rope: 80', 5/16" Diameter (24m, 8mm Diameter)
Fairlead: Aluminum Hawse Fairlead
Wireless (or Wired) Remote Control: Included
Recommended Battery: 650CCA Minimum for Winching
Battery Leads: 25mm², 72" (1.83m)
Finish: Yellow
Weight: 60 lbs. (27.3kg)
Overall Dimensions: (L x W x H) 22" x 6.3" x 8.1" (557 x 160 x 205mm)
Mounting Bolt Pattern: 6.55" ± 0.015" x 4.50" ± 0.010" (162.5mm x 114.3mm)

Line Speed & Amp Draw-First Layer

Line	lbs	No	2000	4000	6000	8000	9000	
Pull	kgs	Load	910	1814	2720	3630	4080	
Line	fpm	12V	37.2	18	13.1	10.2	8.2	7.2
Speed	Mpm	12V	11.4	5.5	4	3.1	2.5	2.2
Motor Current	Amps	12V	70	190	260	335	410	425

Line Pull & Cable Capacity

Layer of Cable		1	2	3	4
Rated Line Pull	lbs	9000	7990	7237	6713
Per Layer	kgs	4080	3621	3280	3042
Cable Capacity	ft.	16	42	72	94
Per Layer	m	5	12	21	28

Exclusive North American Distributor
T-Max, LLC
 P.O. Box 4544 - Elkhart, IN 46514-0544



National Association of Testing Authorities, Australia

