


VEHICLE RECOVERY WINCH
EW-9000W
 [OUTBACK]

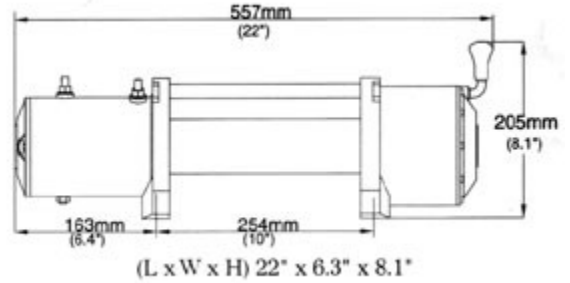

EW-9000W

- Rated Line Pull:** 9000 lbs. (4080kgs) Single-Line
- Motor:** 6.6HP Series-Wound
- Control:** Remote Switch, 12'(3.7m) lead
- Gear Train:** 3-Stage Planetary
- Gear Ratio:** 172.8:1
- Clutch:** Shift Pin Ring Gear
- Brake:** Automatic In-The-Drum
- Drum Size:** Diameter 2.52" (66mm) Length 8.82" (224mm)
- Wire Rope:** 94', 21/64" Diameter (28.5m, 8.2mm Diameter)
- Fairlead:** Roller Fairlead
- Wireless Multi-control:** Included
- Recommended Battery:** 650CCA Minimum for Winching
- Battery Leads:** 25mm², 72" (1.83m)
- Finish:** Black/Dark Grey
- Weight:** 80.5 lbs. (36.5kg)
- Overall Dimensions:** (L x W x H) 22" x 6.3" x 8.1" (557 x 160 x 205mm)
- Mounting Bolt Pattern:** 10.00" ± 0.015" x 4.50" ± 0.010" (254.0mm x 114.3mm)

Line Speed & Amp Draw-First Layer

Line	lbs	No	2000	4000	6000	8000	9000	
Pull	kgs	Load	910	1814	2720	3630	4080	
Line	fpm	12V	37.2	18	13.1	10.2	8.2	7.2
Speed	Mpm	12V	11.4	5.5	4	3.1	2.5	2.2
Motor Current	Amps	12V	70	190	260	335	410	425

Line Pull & Cable Capacity

Layer of Cable		1	2	3	4
Rated Line Pull	lbs	9000	7990	7237	6713
Per Layer	kgs	4080	3621	3280	3042
Cable Capacity	ft.	16	42	72	94
Per Layer	m	5	12	21	28

Exclusive North American Distributor
T-Max, LLC
 P.O. Box 4544 - Elkhart, IN 46514-0544



National Association of Testing Authorities, Australia

